# **CASIO**

# **Getting Acquainted**

Congratulations upon your selection of this CASIO watch. To get the most out of your purchase, be sure to read this manual carefully.

- Warning!

  The measurement functions built into this watch are not intended for taking measurements that require professional or industrial precision. Values produced by this watch should be considered as reasonable representations only.

  The Moon phase indicator and tide graph data that appear on the display of this watch are not intended for navigation purposes. Always use proper instruments and resources to obtain data for navigation purposes.

  This watch is not a precision instrument for calculating low tide and high tide times. The tide graph of this watch is intended to provide a reasonable approximation of tidal movements only.

  Note that CASIO COMPUTER CO., LTD. assumes no responsibility for any damage or loss suffered by you or any third party arising through the use of this product or its malfunction.

E-1

# Keep the watch exposed to bright light




The electricity generated by the solar cell of the watch is stored by a rechargeable battery. Leaving or using the watch where it is not exposed to light causes the battery to run down. Make sure the watch is exposed to light as

- to run down. Make sure the watch is exposed to light as much as possible.

   When you are not wearing the watch on your wrist, position the face so it is pointed at a source of bright light.


   You should try to keep the watch outside of your sleeve
- as much as possible. Charging is reduced significantly if the face is covered only partially.

The watch continues to operate, even when it is not exposed to light. Leaving the
watch in the dark can cause the battery to run down, which will result in some watch
functions to be disabled. If the battery goes dead, you will have to re-configure watch
settings after recharging. To ensure normal watch operation, be sure to keep it
exposed to light as much as possible.



Rechargeable battery

Battery discharges in the dark.



- The actual level at which some functions are disabled depends on the watch model. Frequent display illumination can run down the battery quickly and require charging. The following guidelines give an idea of the charging time required to recover from a single illumination operation.

  Approximately 5 minutes exposure to bright sunlight coming in through a window Approximately about 8 hours exposure to indoor fluorescent lighting

  Be sure to read "Power Supply" (page E-52) for important information you need to know when exposing the watch to bright light.

If the display of the watch is blank...
If the display of the watch is blank, it means that the watch's Power Saving function has turned off the display to conserve power.

• See "Power Saving Function" (page E-66) for more information.

### **About This Manual**



- Button operations are indicated using the letters shown
- Button operations are indicated using the letters shown in the illustration.
   Each section of this manual provides you with the information you need to perform operations in each mode. Further details and technical information can be found in the "Reference" section.

E-5

# Contents

E-4

### General Guide ..... . E-10 Timekeeping ..... Using the Diving Mode ..... F-18 Tide/Moon Data ..... ... E-28 World Time ..... Alarms. .. E-38 Stopwatch . Countdown Timer ..... .. E-45 .... E-48 Illumination ..... F-52 .. E-60 Specifications .....

To set the time and date .....

The following is a handy reference list of all the operational procedures contained in this manual.


To change the Daylight Saving Time (summer time) setting E-17
To start dive time measurement E-21
To stop dive time measurement E-21
To reset a dive time measurement and start interval measurement E-22
To reset a dive time measurement and exit the Diving Mode E-22
To view diving log records E-25
To delete diving log records E-27
To adjust the high tide time E-33

Ε	-6	ì

To reverse the displayed Moon phase E-3	5
To view the time in another city E-3	37
To toggle a city code time between Standard Time and Daylight Saving TimeE-3	37
To set an alarm time E-3	9
To test the alarm E-4	0
To turn an alarm on and offE-4	11
To turn the Hourly Time Signal on and off E-4	2
To measure times with the stopwatch E-4	4
To configure the countdown timer E-4	6
To use the countdown timer E-4	17
To illuminate the display manuallyE-4 E-8	8

To specify the illumination duration	E-49
To turn the auto light switch on and off	E-5
To turn the button operation tone on and off	E-65
To recover from the sleep state	E-6
To turn Power Saving on and off	E-68


F-9

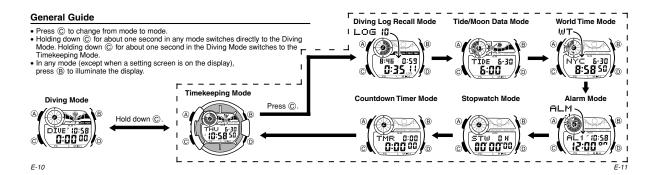

# Timekeeping

Use the Timekeeping Mode to set and view the current time and date.

• Press (a) to toggle between the day of the week and date (Date screen), and the currently selected World Time city and time (Dual Time).



# Read This Before You Set the Time and Date!

Head This Betore You Set the Time and Date! This watch is preset with a number of city codes, each of which represents the time zone where that city is located. When setting the time, it is important that you first select the correct city code for your Home City (the city where you normally use the watch). If your location is not included in the preset city codes, select the preset city code that is in the same time zone as your location.

Note that all of the times for the World Time Mode city codes (page E-36) are displayed in accordance with the time and date settings you configure in the Timekeeping Mode.

### To set the time and date



- In the Timekeeping Mode, hold down (a) until the city code starts to flash, which indicates the setting screen.
   Use (a) and (b) to select the city code you want.
   Make sure you select your Home City code before changing any other setting.
   For full information on city codes, see the "City Code Table" at the back of this manual.

Press © to move the flashing in the sequence shown below to select the other settings.



4. When the timekeeping setting you want to change is flashing, use ① or ⑧ to change it as described below.

Screen:	To do this:	Do this:
TYO		Use ① (east) and ⑧ (west).
ON	Toggle between Daylight Saving Time (ON) and Standard Time (OFF).	Press D.

Screen:	To do this:	Do this:
12H	Press ①.	
- (0:58 00	Reset the seconds to 00	Press D.
. (M·20 nn	Change the hour and minutes	Use () (+) and () (-).
20 11 6-30	Change the year, month, or day	Use () (+) and (B) (-).
MUTE	Toggle the button operation tone between KEY_h (on) and MUTE (off)	Press D.
LT1	Toggle the illumination duration between LT1 (approximately 1.5 seconds) and LT3 (approximately 3 seconds).	Press D.
PS On	Toggle between Power Saving on ( ) and off ( ) FF)	Press D.

E-14 E-15

- 5. Press (A) to exit the setting screen.
  The day of the week is displayed automatically in accordance with the date (year, month, and day) settings.

- 12-hour and 24-hour timekeeping

  With the 12-hour format, the P (PM) indicator appears to the left of the hour digits for times in the range of noon to 11:59 p.m. and no indicator appears to the left of the hour digits for times in the range of midnight to 11:59 a.m.

  With the 24-hour format, times are displayed in the range of 0:00 to 23:59, without any indicator.

  The 12-hour/24-hour timekeeping format you select in the Timekeeping Mode is applied in all other modes.
- applied in all other modes.

Daylight Saving Time (DST)
Daylight Saving Time (summer time) advances the time setting by one hour from Standard Time. Remember that not all countries or even local areas use Daylight Saving Time.



- To change the Daylight Saving Time (summer time) setting

  1. In the Timekeeping Mode, hold down ③ until the city code starts to flash, which indicates the setting screen.
  2. Press ② and the DST setting screen appears.
  3. Use ③ to toggle the DST settings in the sequence
  - shown below

DST off (□FF) → DST on (□F4)

4. When the setting you want is selected, press A to exit the setting screen. • The **DST** indicator appears to indicate that Daylight Saving Time is turned on.

# Using the Diving Mode

You can use the Diving Mode to keep log records of the duration of each of your dives. Each log record includes a log number, the dive time, and the dive start date and time. Each log record includes a log number, the dive time, and the dive start date and time. There is enough memory to hold up to 10 diving log records. You can use the Diving Log Recall Mode to display diving log records currently in memory (page E-24).

• Use © to enter the Diving Mode as shown under "General Guide" on page E-10.
• If you leave the watch in the Diving Mode for about 11 to 12 hours, it will automatically switch to the Timekeeping Mode.

# **Diving Mode Screens**



10:58 I 1:44 0.46 13/**/**0 Dive time (hours

Dive start time

Dive time (hours Current time minutes, seconds)

Current time

Ongoing Dive Time Measurement Screen

# Graphic Area

- The Dive Graph indicates the current dive time in minutes. While a dive time measurement operation is in progress, the current minute of the dive flashes in the graph.

  The Dive Graph time does not include interval time (page E-20).

# CASIO

## Measuring Units and Ranges

Range: 23:59'59" (24 hours)

## Dive Interval Time

 When the interval time exceeds the above range, interval time measurement automatically stops and the current interval time disappears from the screen of the newest diving log record.

About the Interval
The interval is time that elapses between the stop of the last dive and the start of the
next dive. The watch starts an interval measurement whenever you press (a) at the
end of a dive to reset dive time measurement (page E-22).
Note that the current ongoing interval time is shown on the screen of the newest
record in diving log memory. It is not displayed in the Diving Mode. For information
about viewing diving log records, see page E-24.

F-20

The interval is displayed on the screen of the newest diving log, only while an interval timing operation is in progress.

### Starting and Stopping Dive Time Measurement

DIVE 10:58  Be sure to recharge the battery by exposing the watch to light before starting a dive.

### To start dive time measurement In the Diving Mode, press D.

To stop dive time measurement
While a dive time measurement operation is in progress, hold down ① for about one second.
Pressing ① again without resetting the dive time measurement will cause timing to resume from where it was stopped.

F-21

To reset a dive time measurement and start interval measurement
While dive time measurement is stopped, press (a).

• This creates new diving log record with the currently displayed dive time information and starts interval measurement. Current ongoing interval measurement is shown on the screen of the newly created record.

- To reset a dive time measurement and exit the Diving Mode
  While dive time measurement is stopped, hold down © for about one second.


   This creates new diving log record with the currently displayed information and exits the Diving Mode to the Timekeeping Mode.

   See "Diving Log Records" on page E-24 for more information.

### **Diving Time Measurement Example**



. Multiple dives and intervals



- Pressing 
   again after stopping dive time measurement will cause timing to
- resume from where it was stopped.

   Dive time/interval measurement continues internally if you exit the Diving Mode without resetting. A diving log record is not created in this case.

## **Diving Log Records**

A new diving log record is created whenever you reset a dive time measurement, either by pressing @ to start interval measurement or by holding down @ to exit the Diving Mode.

- either by pressing (A) to start there are measurement at a principle of the divergence of the divergen

- To view diving log records

  I. In the Timekeeping Mode, press © to enter the Diving Log Recall Mode.

  This displays the newest record in memory.

  The interval currently being measured is displayed on the screen of the newest divine log record.
- diving log record.

  -":--"will appear on the screen if there is no diving log data stored in memory.

  If you do not perform any operation for about one or two hours in the Diving Log
  Recall Mode, the watch will automatically return to the Timekeeping Mode.

E-24 E-25

- 2. Press 0 to scroll through the log records, from newer to older.  $\bullet$  Log numbers are lower for older log records.


### **Newest Record** Log record number LOG B (B) 0:35 1 0:35 1 15 48 Π: Dive interval Dive tin

To delete diving log records
In the Diving Log Recall Mode, hold down (A) for about three seconds.

• Keep (A) depressed for the full three seconds. During this time, message CLR will flash on the display and then "-:-" will appear. Log records will not be deleted if you release (A) before "-:-" appears. "-:-" indicates that all log records have been

- This procedure deletes all diving log records. Diving log records cannot be deleted
- individually.

  Note that you cannot delete log records while a diving time measurement operation is in progress



E-27

# Tide/Moon Data

In the Tide/Moon Data Mode, you can see the current tide and the current date's Moon phase for your Home City. You can specify a date and view tide and Moon data

- tor that date.
   See "Moon Phase Indicator" (page E-60) for information about the Moon phase indicator and "Tide Graph" (page E-63) for information about the tide graph.
   All of the operations in this section are performed in the Tide/Moon Data Mode (page E-11).

E-26

- It takes about two seconds to calculate tide graph data. You will not be able to
- display a setting screen while data calculation is in progress.

   Moon age is calculated to an accuracy of ±1 day.

# Tide Data

The tide graph that appears first when you enter the Tide/Moon Data Mode shows the data at 6:00 a.m. for your currently selected Home City on the current date, according to the Timekeeping Mode. From there you can specify another date or time.

If the tide data is not correct, check your Timekeeping Mode settings and correct

- If the tide data is not correct, check your Timekeeping Mode settings and correct them if necessary.
  The tide graph is displayed in the Timekeeping Mode, the Tide/Moon Data Mode, and the Diving Mode.
  If the watch is in the Diving Mode when there is a transition from one date to the next, the tide graph contents will not change to reflect the data for the new date. If you want to update the tide graph, exit and then re-enter the Diving Mode.
  If you feel that the information shown by the tide graph is different from actual tide conditions, you need to adjust the high tide time. See "Adjusting the High Tide Time" (page E-32) for more information.

F-28 F-29

# CASIO


### Moon Data

The Moon phase and Moon age information that appears first when you enter the Tide/Moon Data Mode shows the data at noon for your currently selected Home City on the current date, according to the Timekeeping Mode. After that you can specify another date to view data.

- If the Moon data is not correct, check your Timekeeping Mode settings and correct
- them if necessary.

  The Moon phase is displayed in the Timekeeping Mode, the Tide/Moon Data Mode,
- The Moon prase is displayed in the Timekeeping Mode, the Tide/Moon Data Mode, and the Diving Mode.
   If the watch is in the Diving Mode when there is a transition from one date to the next, the Moon phase will not change to reflect the phase for the new date. If you want to update the Moon phase, exit and then re-enter the Diving Mode.
   If the Moon phase indicator shows a phase that is a mirror image of the actual Moon phase in your area, you can use the procedure under "Reversing the Displayed Moon Phase" (page E-34) to change it.

Tide/Moon Data Screens In the Tide/Moon Data Mode, press (A) to toggle between the tide data screen and the Moon data screen.



E-30 F-31

- When you display the Tide Data Screen, it initially shows tide data for 6:00 a.m.
  Use the Tide Data Screen to specify the Tide Data time. You can use ① (+) to change the displayed time in one-hour increments.
  Use the Moon Data Screen to specify the Tide/Moon Data date. You can use ② (+) to change the displayed date in one-day increments. Pressing ② will display the year of the displayed date.

Adjusting the High Tide Time
Use the following procedure to adjust the high tide time within a particular date. You can find out high tide information for your area from a tide table, the Internet, or your local newspaper.

0E-3 NOTH

- To adjust the high tide time

  1. In the Tide/Moon Data Mode, hold down (A) until the

  - In the Tide/Moon Data Mode, hold down (a) until the hour digits start to flash.

    2. Use (b) (+) and (b) (-) to change the hour setting.

    3. When the hour is the setting you want, press (c).

     This will cause the minute digits to flash.

    4. Use (b) (+) and (b) (-) to change the minute setting.

     Pressing (b) and (b) at the same time while the time adjustment screen is displayed (steps 2 through 4 above) will return the high tide time to its initial factory default setting.

    5. When the minute setting is the way you want, press (a) to exit the adjustment screen and return to the Tide/Moon Data Mode screen.

     The high tide time setting is not affected by the DST (summer time) setting of the Timekeeping Mode.



 On some days, there are two high tides. With this watch, you can adjust the first high
tide time only. The second high tide time for that day is adjusted automatically based on the first high tide time.

Reversing the Displayed Moon Phase
The left-right (east-west) appearance of the Moon depends on whether the Moon is north of you (northerly view) or south of you (southerly view) as you view it. You can use the procedure below to reverse the displayed Moon phase so it matches the actual appearance of the Moon where you are located.

• To determine the viewing direction of the Moon, use a compass to take a direction reading of the Moon at its meridian passage.

• For information about the Moon phase indicator, see "Moon Phase Indicator" (page E-60).



- To reverse the displayed Moon phase

  1. In the Tide/Moon Data Mode, hold down (A) until the 2. Press © twice.
  - This will cause the Moon phase indicator to flash. This
  - is the indicator switching screen.

    Press ① to toggle the Moon phase indicator between the southerly view (indicated by N № 5) and northerly
  - the southerly view (indicated by N 4 S).

    Northerly view: Moon is north of you.

    Southerly view: Moon is south of you.

    When the Moon phase indicator setting is the way you want, press (a) to exit the switching screen and return to the Tide/Moon Data Mode screen.

E-34 E-35

# **World Time**



World Time shows the current time in 48 cities (31 time

- world 1 line shows the current time in 48 cities (31 time zones) around the world.

   The times kept in the World Time Mode are synchronized with the time being kept in the Timekeeping Mode. If you feel that there is an error in any World Time Mode time, check to make sure you have the correct city selected as your Home City. Also check to make sure that the current time as shown in
- cneck to make sure that the current time as shown in the Timekeeping Mode is correct.

  Select a city code in the World Time Mode to display the current time in any particular time zone around the globe. See the "City Code Table" at the back of this manual for information about the UTC differential existing the tops prepared.
- settings that are supported.

   All of the operations in this section are performed in the World Time Mode, which you enter by pressing ©

To view the time in another city
While in the World Time Mode, use ① (eastward) to scroll through the city codes
(time zones).

will all the cones).

• Pressing (a) and (b) at the same time will jump to the UTC time zone



- To toggle a city code time between Standard Time and Daylight Saving Time

  1. In the World Time Mode, use 

  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Time Mode, use 
  1. In the World Ti
  - (time zone) whose standard Ime/Daylight Saving Time setting you want to change.

    2. Hold down (A) to toggle between Daylight Saving Time (DST indicator not displayed) and Standard Time (DST indicator not displayed).

     The DST indicator is shown on the World Time Mode
  - screen while Daylight Saving Time is turned on.
- Note that the Standard Time/Daylight Saving Time setting affects only the currently displayed city code. Other city codes are not affected.
   Note that you cannot switch between Standard Time and Daylight Saving Time while UTC is selected as the city code.

# **Alarms**



The Alarm Mode gives you a choice of four one-time alarms and one snooze alarm.
Also use the Alarm Mode to turn the Hourly Time Signal

- Also use the Alarm Mode to turn the Houry Time Signal (\$\frac{5}{1}\tilde{G}\$) on and off.

   There are five alarm screens numbered AL 1 , AL 2 , AL 3 and AL 4 for the one-time alarm, and a snooze alarm screen indicated by \$\frac{5}{1}\tilde{G}\$. The Hourly Time Signal screen is indicated by \$\frac{5}{1}\tilde{G}\$.

   All of the operations in this section are performed in the Narm Medic which you note by precipe \$\infty\$ (note).
- Alarm Mode, which you enter by pressing © (page

# To set an alarm time



1. In the Alarm Mode, use (D) to scroll through the alarm screens until the one whose time you want to set is displayed.



- To set a one-time alarm, display alarm screen RL1, ALZ, RL3 or RL4. To set the snooze alarm, display the SNZ screen.

   The snooze alarm repeats every five minutes.

   After you select an alarm, hold down (a) until the hour setting of the alarm time starts to flash, which indicates the setting screen.

   This operation turns on the alarm automatically.

   Press (b) to move the flashing between the hour and minute settings.

   While a setting is flashing, use (b) (-) and (b) (-) to change it.

   With the 12-hour format, set the time correctly as a.m. or p.m. (P indicator).

   Press (a) to exit the setting screen.

F-38 F-39

# CASIO

### Alarm Operation

- Alarm Operation
  The alarm tone sounds at the preset time for 10 seconds, regardless of the mode the watch is in. In the case of the snooze alarm, the alarm operation is performed a total of seven times, every five minutes, until you turn the alarm off (page E-41).

   Alarm and Hourly Time Signal operations are performed in accordance with the Timekeeping Mode time.

   To stop the alarm tone after it starts to sound, press any button.

   Performing any one of the operations below during a 5-minute interval between snooze alarms cancels the current snooze alarm operation.

  Displaying the SNZ setting screen (page E-13)

  Displaying the SNZ setting screen (page E-39)

To test the alarm In the Alarm Mode, hold down ① to sound the alarm.

## To turn an alarm on and off Alarm on indicator

6:30

On/Off status

In the Alarm Mode, use ① to select an alarm.



- 2. Press (a) to toggle it on (n) and off (--).

   Turning on an alarm (AL1, AL2, AL3, AL4 or SNZ) displays the alarm on indicator on its Alarm Mode
- on all modes, the alarm on indicator is shown for any alarm that currently is turned on.

  The alarm on indicator flashes while the alarm is
- sounding.
- The snooze alarm indicator (SNZ) flashes while the snooze alarm is sounding and during the 5-minute intervals between alarms.

F-40 F-41



On/Off status

To turn the Hourly Time Signal on and off

Hourly time signal on Indicator

1. In the Alarm Mode, use ① to select the Hourly Time Signal (S I ⑤).

2. Press ۞ to toggle it on (n n) and off (--).

1. The Hourly Time Signal on indicator is shown on the display in all modes while this function is turned on.

# Stopwatch



The stopwatch lets you measure elapsed time, split times,

- and two finishes.

  The display range of the stopwatch is 23 hours, 59 minutes, 59.99 seconds.

  The stopwatch continues to run, restarting from zero

- The stopwatch continues to run, restarting from zero after it reaches its limit, until you stop it.

  The stopwatch measurement operation continues even if you exit the Stopwatch Mode.

  Exiting the Stopwatch Mode while a split time is frozen on the display clears the split time and returns to elapsed time measurement.

  All of the operations in this section are performed in the Stopwatch Mode, which you enter by pressing © (page E-11).

# To measure times with the stopwatch

### Elapsed Time (D) (D) (A) Start Re-start Stop Clear Split Time (A) (n) (D) (A) Split release Start Split (SPL displayed) Stop Clear Two Finishes **(A)** (D) (A) (A) Split release Display time of second runner. Split First runner finishes. Stop Second runner

## Countdown Timer



You can set the countdown timer within a range of one minute to 24 hours. An alarm sounds when the countdown

• All of the operations in this section are performed in the
• Countdown Timer Mode, which you enter by pressing
© (page E-11).

# Countdown End Beeper

The countdown end beeper lets you know when the countdown reaches zero. The beeper stops after about 10 seconds or when you press any button.

E-44 E-45

# To configure the countdown times



- While the countdown start time is on the display in the Countdown Timer Mode, hold down (A) until the current countdown start time starts to flash, which indicates the continuous con
- If the countdown start time is not displayed, use the In the countown start unite is not displayed, use the procedure under "To use the countdown timer" (page E-47) to display it.

  Perss © to move the flashing between the hour and minute settings.

  When a setting is flashing, use ① (+) and ⑥ (-) to chance it.

- change it.To specify a countdown start time of 24 hours, set
- 4. Press (A) to exit the setting screen.

# To use the countdown times



- Press ① while in the Countdown Timer Mode to start the countdown timer.

   The countdown timer operation continues even if you exit the Countdown Timer Mode.

   Press ② while a countdown operation is in progress to pause it. Press ② again to resume the countdown.

   To stop a countdown operation completely, first pause it (by pressing ②), and then press ②. This returns the countdown time to its starting value.

E-47

# Illumination



This watch has an EL (electro-luminescent) panel that causes the entire display to glow for easy reading in the dark. The watch's auto light switch turns on illumination automatically when you angle the watch towards your

- acuse.
  The auto light switch must be turned on (indicated by the auto light switch on indicator) for it to operate.
  See "Illumination Precautions" (page E-70) for other important information about using illumination.

- To illuminate the display manually
  In any mode, press ® to turn on illumination.

  The above operation turns on illumination regardless of
  the current auto light switch setting.
- You can use the procedure below to select either 1.5 seconds or 3 seconds as the illumination duration when you press ®.
  • Regardless of the watch's current illumination duration setting, the display remains
- illuminated for about three seconds in the Diving Mode



- To specify the illumination duration

  1. In the Timekeeping Mode, hold down @ until the display contents start to flash. This is the setting screen.

  2. Press © 10 times until the current illumination duration
  - setting ( LT1 or LT3 ) appears.

    3. Press ① to toggle the setting between LT1
  - (approximately 1.5 seconds) and LTE (approximately 3 seconds).
    4. Press (A) to exit the setting screen.

F-48 F-49

# CASIO

### About the Auto Light Switch

Turning on the auto light switch causes illumination to turn on, whenever you position your wrist as described below in any mode. Note that this watch features a "Full Auto EL Light," so the auto light switch operates only when available light is below a certain level. It does not turn on the backlight under bright light.

Moving the watch to a position that is parallel to the ground and then tilting it towards you more than 40 degrees causes illumination to turn on.

• Wear the watch on the outside of your wrist.



# Warning!

- Warning!

   Always make sure you are in a safe place whenever you are reading the display of the watch using the auto light switch. Be especially careful when running or engaged in any other activity that can result in accident or injury. Also take care that sudden illumination by the auto light switch does not startle or distract others around you.

   When you are wearing the watch, make sure that its auto light switch is turned off before riding a bicycle or operating a motorcycle or any other motor vehicle. Sudden and unintended operation of the auto light switch can create a distraction which can result in a traffic accident and serious personal injury.
- distraction, which can result in a traffic accident and serious personal injury.

To turn the auto light switch on and off In the Timekeeping Mode, hold down (B) for about three seconds to toggle the auto light switch on (auto light switch on indicator displayed) and off (auto light switch on indicator not displayed).

 The auto light switch on indicator is on the display in all modes while the auto light switch is turned on.

E-50 E-51

# **Power Supply**

This watch is equipped with a solar cell and a rechargeable battery that is charged by the electrical power produced by the solar cell. The illustration shown below shows how you should position the watch for charging.

Example: Orient the watch so its face is

- pointing at a light source.

   The illustration shows how to position a watch with a resin band.
- water with a resin band.

  Note that charging efficiency drops when any part of the solar cell is blocked by clothing, etc.
- You should try to keep the watch outside of your sleeve as much as possible. Charging is reduced significantly even if the face is covered only partially







- Important!

   Storing the watch for long periods in an area where there is no light or wearing it in such a way that it is blocked from exposure to light can cause rechargeable battery power to run down. Make sure that the watch is exposed to bright light whenever
- possible.

  This watch uses a rechargeable battery to store power produced by the solar cell, so This watch uses a rechargeable battery to store power produced by the solar cell, so regular battery replacement is not required. However, after very long use, the rechargeable battery may lose its ability to achieve a full charge. If you experience problems getting the rechargeable battery to charge fully, contact your dealer or CASIO distributor about having it replaced.

  Never try to remove or replace the watch's rechargeable battery yourself. Use of the wrong type of battery can damage the watch.
  All data stored in memory is deleted, and the current time and all other settings return to their initial factory defaults whenever battery power drops to Level 5 (page E-54) and when you have the battery replaced.

  Turn on the watch's Power Saving function (page E-66) and keep it in an area normally exposed to bright light when storing it for long periods. This helps to keep the rechargeable battery from going dead.

E-52

Battery Power Indicator and Recover Indicator
The battery power indicator on the display shows you the current status of the rechargeable battery's power.



s power		
Level	Battery Power Indicator	Function Status
1	L M▶H	All functions enabled.
2	L►M H	All functions enabled.
3	Charge Soon Alert)	Illumination, beeper, and Diving Mode access disabled.
4	CHG:	Except for timekeeping and the CHG (charge) indicator, all functions and display indicators disabled.
5	LMH	All functions disabled.

- At Level 5, all functions are disabled and settings return to their initial factory defaults. Once the battery reaches Level 2 after falling to Level 5, reconfigure the current time, date, and other settings.
  The watch's Home City code setting will change automatically to TYO (Tokyo) whenever the battery drops to Level 5.
  Display indicators reappear as soon as the battery is charged from Level 5 to Level 2.
  Leaving the watch exposed to direct sunlight or some other very strong light source can cause the battery power indicator to show a reading temporarily that is higher than the actual battery level. The correct battery level should be indicated after a few minutes.

E-54 E-55



- If you use the light or alarms a number of times during a in you use the light of admits a further or inflex during short period, all segments of the battery power indicate flash and the following operations become temporarily disabled as battery power recovers.

  - Display illumination
- Alarm and hourly time signal

Access to Diving Mode
After some time, the battery power indicator should stop flashing to indicate that battery power is back to normal. At this time the watch should return to normal operation.

If the battery power indicator frequently flashes, it means that battery power is low. Leave the watch in bright light to allow it to charge.

Charging Precautions
Certain charging conditions can cause the watch to become very hot. Avoid leaving
the watch in the areas described below whenever charging its rechargeable battery.
Also note that allowing the watch to become very hot can cause its liquid crystal
display to black out. The appearance of the LCD should become normal again when
the watch returns to a lower temperature.

to become quite hot. Take care when handling the watch in bright light to charge its rechargeable battery can cause it to become quite hot. Take care when handling the watch to avoid burn injury. The watch can become particularly hot when exposed to the following conditions for long periods.

- On the dashboard of a car parked in direct sunlight
  Too close to an incandescent lamp
  Under direct sunlight

E-57

# **Charging Guide**

The following table shows the amount of time the watch needs to be exposed to light each day in order to generate enough power for normal daily operations.

Exposure Level (Brightness)	Approximate Exposure Time
Outdoor Sunlight (50,000 lux)	5 minutes
Sunlight Through a Window (10,000 lux)	24 minutes
Daylight Through a Window on a Cloudy Day (5,000 lux)	48 minutes
Indoor Fluorescent Lighting (500 lux)	8 hours

- For details about the battery operating time and daily operating conditions, see the "Power Supply" section of the Specifications (page E-75).
   Stable operation is promoted by frequent exposure to light.

The table below shows the amount exposure that is required to take the battery from

one level to the next.									
Exposure Level	Approxim	Approximate Exposure Time							
(Brightness)	Level 5	Level 4	Level 3	Level 2	Level 1				
Outdoor Sunlight (50,000 lux)		2 hours	17 hours	5 hours					
Sunlight Through a Window (10,000 lux)		7 hours	84 hours	23 hours					
Daylight Through a Window on a Cloudy Day (5,000 lux)		13 hours	171 hours	46 hours					
Indoor Fluorescent Lighting (500 lux)		145 hours							

The above exposure time values are all for reference only. Actual required exposure times depend on lighting conditions.

F-58 F-59

F-61

## Reference

This section contains more detailed and technical information about watch operation. It also contains important precautions and notes about the various features and functions of this watch.

# Moon Phase Indicator



The Moon phase indicator of this watch indicates the Ine Moon phase indicator of this watch indicates the current phase of the Moon as shown below. It is based on the view of the left side of the moon at meridian transit from the northern hemisphere of the Earth. If the appearance of the Moon phase indicator is reversed from the actual Moon as viewed from your location, you can use the procedure under "To reverse the displayed Moon phase" (nage 1-5.8) to Cappage the indicator. phase" (page E-35) to change the indicator.

	(par	t you can	not see) –		-Moon p	hase (par	t you can	see)
Moon Phase Indicator								
Moon Age	28.7-29.8 0.0-0.9	1.0-2.7	2.8-4.6	4.7-6.4	6.5-8.3	8.4-10.1	10.2-12.0	12.1-13.8
Moon Phase	New Moon				First Quarter (Waxing)			

Moon Phase Indicator								
Moon Age	13.9-15.7	15.8-17.5	17.6-19.4	19.5-21.2	21.3-23.1	23.2-24.9	25.0-26.8	26.9-28.6
Moon Phase	Full Moon				Last Quarter (Waning)			

E-60

### Tidal Movements


Tidal Movements
Tides are the periodic rise and fall of the water of oceans, seas, bays, and other
bodies of water caused mainly by the gravitational interactions between the Earth,
Moon and Sun. Tides rise and fall about every six hours. The Tide Graph of this watch
indicates tidal movement based on the Moon's transit over a meridian and the lunitidal
interval. The Tide Graph calculates and graphically represents current tide conditions
in your Home City or a port city in the vicinity of the Home City based on longitudes,
lunar day length, and lunitidal interval preset in watch memory, and on high tide times
specified by you.

# Tide Graph

The Tide Graph graphically represents the current tide condition using one of three patterns that represent spring tide, intermediate tide, and neap tide, as shown below.

Tide Name	Graph	Description
Spring Tide	1112	Large difference between high tide and low tide. Occurs a few days before and after a New Moon and Full Moon.
Intermediate Tide	IN SUPERIOR	Medium difference between high tide and low tide.
Neap Tide		Small difference between high tide and low tide. Occurs a few days before and after the first quarter and last quarter of a half Moon.

• The Tide Graph flashes as shown below to indicate the tide range



• The segments on either end of the Tide Graph flash during high tide

### **Button Operation Tone**

Mute indic



The button operation tone sounds any time you press one of the watch's buttons. You can turn the button operation tone on or off as desired.

Even if you turn off the button operation tone, alarms, the Hourly Time Signal, and other beepers all operate

normally.

# To turn the button op



- ation tone on and off

  1. In the Timekeeping Mode, hold down (a) until the city code starts to flash, which indicates the setting screen.

  2. Press (a) nine times until the current button operation
- 2. Press ① Inter times until the current outon operation tone setting ( REYLD of MILTE) appears.

  3. Press ① to toggle the setting between REYLD (tone on) and MILTE (tone off).

  4. Press ② to exit the setting screen.

   The mute indicator is displayed in all modes when the button operation tone is turned off.
- E-65

# **Power Saving Function**

E-64



When turned on, the Power Saving function enters a sleep state automatically whenever the watch is left in an area for a certain period where it is dark. The table below shows how watch functions are affected by the Power Saving function

Power saving indicator

Elapsed Time in Dark	Display	Operation
60 to 70 minutes		All functions enabled, except for the display
6 or 7 days		Beeper tone, illumination, and display are disabled.

• Wearing the watch inside the sleeve of clothing can cause it to enter the sleep state.

- The watch will not enter the sleep state between 6:00 AM and 9:59 PM. If the watch is already in the sleep state when 6:00 AM arrives, however, it will remain in the sleep state.

  The watch will not enter a sleep state while in the Diving Mode, Stopwatch Mode, or Countdown Timer Mode.

# To recover from the sleep state

- Perform any one of the following operations.

   Move the watch to a well-lit area.
- Press any button.
   Angle the watch towards your face for reading (page E-50).



- To turn Power Saving on and off 1. In the Timekeeping Mode, hold down (A) until the city 1. In the Timekeeping wode, note down (a) until the city code starts to flash, which indicates the setting screen.
  2. Press (© 11 times until the Power Saving on/off screen appears.
  3. Press (B) to toggle Power Saving on (II fl) and off (II FF).
  4. Press (A) to exit the setting screen.

  The Power Saving indicator is on the display in all modes while Power Saving is turned on.

# Auto Return

- rform any operation for about two or three minutes while a setting screen (with a flashing setting) is on the display, the watch will exit the setting screen
- automatically.

  The watch returns to two or three minutes in the Alarm Mode and Tide/Moon Data

(B) and (D) are used in various modes and setting screens to scroll through data on the display. In most cases, holding down these buttons during a scroll operation scrolls at high speed.

# **Initial Screens**

When you enter the World Time Mode or Alarm Mode, the data you were viewing when you last exited the mode appears first.

# Timekeeping

- Imekeeping

  Resetting the seconds to 00 while the current count is in the range of 30 to 59 causes the minutes to be increased by 1. In the range of 00 to 29, the seconds are reset to 00 without changing the minutes.

  The year can be set in the range of 2000 to 2099.

  The watch's built-in full automatic calendar makes allowances for different month lengths and leap years. Once you set the date, there should be no reason to change it except when battery power drops to Level 5 (page E-54).

F-68 F-69

CASIO

The current time for all city codes in the Timekeeping Mode and World Time Mode is calculated in accordance with the Coordinated Universal Time (UTC) for each city, based on your Home City time setting.

The seconds count of the World Time is synchronized with the seconds count of the Timekeeping Mode.

# Illumination Precautions

- The electro-luminescent panel that provides illumination loses power after very long
- Illumination may be difficult to see when viewed under direct sunlight.
- Illumination may be dinicult to see when viewed under oriect sunight.
   The watch may emit an audible sound whenever the display is illuminated. This is due to vibration of the EL panel used for illumination, and does not indicate malfunction.
   Illumination turns off automatically whenever an alarm sounds.
   Frequent use of illumination runs down the battery.

Auto light switch precautions

Avoid wearing the watch on the inside of your wrist while the auto light switch is enabled. Doing so causes the auto light switch to operate when it is not needed, which shortens battery life. If you want to wear the watch on the inside of your wrist, disable the auto light switch feature.

More than 15 degrees



- Illumination may not turn on if the face of the watch is more than 15 degrees above or below parallel. Make sure that the back of your hand is parallel to the ground.
- . Illumination turns off after a preset amount of time (1.5 or 3 seconds), even if you keep the watch pointed towards your face.
- Static electricity or magnetic force can interfere with proper operation of the auto light switch. If illumination does not turn on, try moving the watch back to the starting position (parallel with the ground) and then tilt it back toward you again. If this does not work, drop your arm all the way down so it hangs at your side, and then bring it

E-70

- Under certain conditions, illumination may not turn on until about one second after you turn the face of the watch towards you. This does not necessarily indicate malfunction of the auto light switch.
   You may notice a very faint clicking sound coming from the watch when it is shaken back and forth. This sound is caused by mechanical operation of the auto light switch, and does not indicate a problem with the watch.

# **Specifications**

Accuracy at normal temperature: ±15 seconds a month
Timekeeping: Hour, minutes, seconds, p.m. (P), month, day, day of the week
Time format: 12-hour and 24-hour
Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099
Other: Home City code (can be assigned one of 48 city codes); Standard Time /
Daylight Saving Time (summer time)

Diving Functions:

Diving Functions:
Dive time measurement unit: 1 second
Dive time measurement range: 23:59'59" (24 hours)
Dive interval time measurement unit: 1 minute
Dive interval time measurement range: 47:59' (48 hours)
Diving log records: 10 (Dive start month, day, and time, dive time, dive interval time) Tide/Moon Data:

Moon phase indicator for specific date; Tide level for specific date and time Other: High tide time adjustment; Moon phase reversal World Time: 48 cities (31 time zones)
Other: Daylight Saving Time/Standard Time

E-73

Alarms: 5 daily alarms (four one-time alarms; one snooze alarm); Hourly Time Signal Stopwatch:

Measuring unit: 1/100 second
Measuring capacity: 23:59' 59.99"
Measuring modes: Elapsed time, split time, two finishes
Countdown Timer:

E-72

Measuring unit: 1 second
Input range: 1 minute to 24 hours (1-minute increments and 1-hour increments)
Illumination: EL (electro-luminescent panel); Full Auto Light Switch; Selectable

illumination duration Other: Button operation tone on/off

Power Supply: Solar cell and one rechargeable battery
Approximate battery operating time: 10 months (from full charge to Level 4) under
the following conditions:

the following conditions:

• Watch not exposed to light
• Internal timekeeping
• Display on 18 hours per day, sleep state 6 hours per day
• 1 illumination operation (1.5 seconds) per day
• 10 seconds of alarm operation per day
• 50 Diving Mode operations per year (60-minute dive time per measurement)

Frequent use of illumination runs down the battery. Particular care is required when using the auto light switch.

E-74 E-75

# City Code Table

City Code	City	UTC Offset/ GMT Differential
PPG	Pago Pago	-11
HNL	Honolulu	-10
ANC	Anchorage	-9
YVR	Vancouver	-8
LAX	Los Angeles	-8
YEA	Edmonton	-7
DEN	Denver	
MEX	Mexico City	-6
CHI	Chicago	-6
NYC	New York	-5
SCL	Santiago	4
YHZ	Halifax	_4
YYT	St. Johns	-3.5

City Code	City	UTC Offset/ GMT Differential
RIO	Rio De Janeiro	-3
FEN	Fernando de Noronha	-2
RAI	Praia	-1
UTC		
LIS	Lisbon	0
LON	London	
MAD	Madrid	
PAR	Paris	
ROM	Rome	+1
BER	Berlin	
STO	Stockholm	
ATH	Athens	
CAI	Cairo	+2
JRS	Jerusalem	

City Code	City	UTC Offset/ GMT Differential
MOW	Moscow	+3
JED	Jeddah	
THR	Tehran	+3.5
DXB	Dubai	+4
KBL	Kabul	+4.5
KHI	Karachi	+5
DEL	Delhi	+5.5
KTM	Kathmandu	+5.75
DAC	Dhaka	+6
RGN	Yangon	+6.5
BKK	Bangkok	+7

City Code	City	UTC Offset/ GMT Differential
SIN	Singapore	
HKG	Hong Kong	+8
BJS	Beijing	+0
TPE	Taipei	
SEL	Seoul	+9
TYO	Tokyo	+9
ADL	Adelaide	+9.5
GUM	Guam	+10
SYD	Sydney	+10
NOU	Noumea	+11
WLG	Wellington	+12

. Based on data as of July 2010.

Based on data as of July 2010.
 The rules governing global times (UTC offset and GMT differential) and summer time are determined by each individual country.